

10-12-00 09/673161 PCT\$

U.S. Application No.

International Application No.

Attorney Docket No.


Unknown

PCT/GB00/00385

ORII2.001APC

Date: October 11, 2000

414 Rec'd PCT/PTO 11 OCT 2000



TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 USC 371

International Application No.: PCT/GB00/00385  
International Filing Date: February 9, 2000  
Priority Date Claimed: February 11, 1999  
Title of Invention: MESSAGING ARCHITECTURE  
Applicant(s) for DO/EO/US: Thomas Ralph Edward Greenwell

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 USC 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 USC 371.
3. ☒ This is an express request to begin national examination procedures (35 USC 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 USC 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 USC 371(c)(2))
  - a) ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b) ☐ has been transmitted by the International Bureau.
  - c) ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 USC 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 USC 371(c)(3))
  - a) ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b) ☐ have been transmitted by the International Bureau.
  - c) ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d) ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 USC 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 USC 371(c)(4)).
10. ☐ A copy of the International Preliminary Examination Report with any annexes thereto, such as any amendments made under PCT Article 34.
11. ☐ A translation of the annexes, such as any amendments made under PCT Article 34, to the International Preliminary Examination Report under PCT Article 36 (35 USC 371(c)(5)).

U.S. Application No.  
Unknown

International Application No.  
PCT/GB00/00385

09/673161

Attorney Docket No.

ORII2.001APC

Date: October 11, 2000

529 Rec'd PCT/PTO 11 OCT 2000


**Items 11. to 16. below concern other document(s) or information included:**

12. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
13. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
14. ☒ A FIRST preliminary amendment.  
☐ A SECOND or SUBSEQUENT preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A power of attorney and/or address letter.
17. ☐ International Application as published.
18. ☐ Small Entity Statement.
19. ☐ PCT Form PCT/IPEA/402.
20. ☐ PCT Form PCT/IB/308.
21. ☐ PCT request form.
22. ☒ A return prepaid postcard.
23. ☒ The following fees are submitted:

09/673161-104300

U.S. Application No.  
Unknown

Date: October 11, 2000



International Application No.  
PCT/GB00/00385

09/673161

Attorney Docket No.  
ORII2.001APC

529 Rec'd PCT/PTO 11 OCT 2000


				FEES
BASIC FEE				\$860
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total Claims	23 - 20 =	3 ×	\$18	\$54
Independent Claims	9 - 3 =	6 ×	\$80	\$480
Multiple dependent claims(s) (if applicable)			\$270	\$0
TOTAL OF ABOVE CALCULATIONS				\$1394
Reduction by 1/2 for filing by small entity (if applicable). Verified Small Entity statement must also be filed. (NOTE 37 CFR 1.9, 1.27, 1.28)				
TOTAL NATIONAL FEE				\$
TOTAL FEES ENCLOSED				\$1394
amount to be refunded:				\$
amount to be charged:				\$

24. (X) The fee for later submission of the signed oath or declaration set forth in 37 CFR 1.492(e) will be paid upon submission of the declaration.
25. (X) A check in the amount of \$1394 to cover the above fees is enclosed.
26. () Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40 per property.
27. (X) The Commissioner is hereby authorized to charge only those additional fees which may be required, now or in the future, to avoid abandonment of the application, or credit any overpayment to Deposit Account No. 11-1410. A duplicate copy of this sheet is enclosed.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

KNOBBE, MARTENS, OLSON & BEAR, LLP  
620 Newport Center Drive  
Sixteenth Floor  
Newport Beach, CA 92660

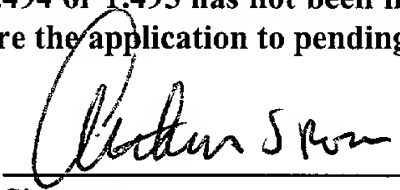  
Signature

Arthur S. Rose  
Printed Name

28,038  
Registration Number



ORII2.001APC

09/673161

529 Rec'd PCT/PTO 11 OCT 2000

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Thomas Ralph Edward Greenwell ) Group Art Unit Unknown  
Appl. No. : Not Assigned )  
Filed : Herewith )  
For : MESSAGING ARCHITECTURE )  
Examiner : Unknown )

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents  
Washington, D.C. 20231

Dear Sir:

Prior to examination of the above-captioned application, please amend the application as follows:

IN THE SPECIFICATION:

Please amend the specification as follows:

On page 1, line 2, please underline --Field of the Invention--.

On page 1, line 7, please replace "Description of the Prior Art" with --Background of the Invention--.

On page 1, line 25, please replace "Statement of the Present Invention" with --Summary of the Invention--.

On page 1, line 27, please replace "2" with --two--.

On page 1, line 28 and 29, please delete -- "the step of" --.

On page 6, line 10, please replace "2" with --two--.

On page 6, line 29, please replace "2" with --two--.

On page 7, line 4, please replace "forth" with --fourth--.

On page 7, line 23, please replace "despatch" with --dispatch--.

Appl. No. : Not Assigned  
Filed : Herewith

On page 8, line 1, please replace "forth" with --fourth--.

On page 8, line 3, please replace "forth" with --fourth--.

On page 8, line 9, please underline – Brief Description of the Drawing --.

On page 8, line 16, please replace "Detailed Description" with --Detailed Description of the Invention --.

On page 17, line 1, please replace "Claims" with --WHAT IS CLAIMED IS:--.

On page 22, line 1, please underline –Abstract--.

IN THE CLAIMS:

Please cancel Claims 1-23 without prejudice.

Please add new Claims 24-46 as follows:

24. A method of manipulating electronically generated messages belonging to at least two of the following messages types: e-mail, fax, video, pager, SMS, voice mail; comprising handling the electronically generated messages using a single messaging application.

25. The method of manipulating electronically generated messages of Claim 24 wherein the single messaging application handles attributes of messages, these attributes being shared by all of the message types.

26. The method of manipulating electronically generated messages of Claim 25 wherein the single messaging application invokes or applies operations to the attributes of the messages, these operations being applicable to all of the message types which are capable of being manipulated by the single messaging application.

27. The method of manipulating electronically generated messages of Claim 26 wherein the messaging application interfaces with one or more databases of loadable software code modules relating to at least one of message type specific attributes and operations.

28. The method of manipulating electronically generated messages of Claim 27, wherein a new messaging type can be dynamically added to a system whilst the system is fully operational by adding new loadable software code modules to one or more databases.

**Appl. No.** : **Not Assigned**  
**Filed** : **Herewith**

29. The method of manipulating electronically generated messages of Claim 26 wherein all user interface code is accessed through a database using loadable software code modules.

30. A software program for manipulating messages of a given type, comprising loadable software code modules capable of interfacing with a single messaging application, the loadable software code modules relating to at least one of message type specific attributes and operations and the single messaging application being operable to manipulate electronically generated messages belonging to at least two of the following messages types: e-mail, fax, video, pager, SMS and voice mail.

31. The software program as claimed in Claim 30 wherein the software program is a dynamically loadable plug-in to the single messaging application.

32. The software program as claimed in Claim 30 wherein each loadable software code module is individually capable of enabling the execution of one or more tasks including:

- a) Reporting to the single messaging application functional capabilities of one or more loadable software code modules;
- b) Supplying text for on-screen menus;
- c) Creating, editing, displaying messages;
- d) Converting messages to be sent by the application to a protocol and format required by an external recipient and a conversion of messages received by the application to a protocol and format required by the single messaging application.

33. The software program as claimed in Claim 32 wherein the loadable software code is object oriented code which creates real objects to execute a task.

34. A software program messaging application capable of manipulating electronically generated messages belonging to at least two of the following messages types: e-mail, fax, video, pager, SMS, and voice mail.

35. A computer operating system comprising a single messaging application operable to handle at least two of the following messages types: e-mail, fax, video, pager, SMS, and voice mail.

36. An operating system operable in conjunction with a software program for manipulating messages of a given type, comprising loadable software code modules capable of interfacing with a

Appl. No. : Not Assigned  
Filed : Herewith

single messaging application, the loadable software code modules relating to at least one of message type specific attributes and operations and the single messaging application being operable to manipulate electronically generated messages belonging to at least two of the following messages types: e-mail, fax, video, pager, SMS and voice mail.

37. A method of manipulating electronically generated messages using a messaging application, wherein the messaging application interfaces with several databases, each having loadable software code modules, each database individually providing code modules relevant to the execution of one or more tasks including:

- a) Reporting to the messaging application functional capabilities of one or more loadable software code modules;
- b) Supplying text for on-screen menus;
- c) Creating, editing, displaying messages;
- d) Converting messages to be sent by the application to a protocol and format required by an external recipient and a conversion of messages received by the application to a protocol and format required by the messaging application.

38. The method of manipulating electronically generated messages of Claim 37, wherein appropriate software code modules are loaded only when required by the messaging application.

39. The method of manipulating electronically generated messages of Claim 37 wherein the messaging application can handle at least two of the following messages types: e-mail, fax, video, pager, SMS, voice mail.

40. The method of manipulating electronically generated messages of Claim 39 wherein code to manipulate each message type is accessed using several databases, each having loadable software code modules, each database individually providing code modules relevant to the execution of one or more of said tasks.

41. The method of manipulating electronically generated messages of Claim 40 wherein the application can be enhanced to manipulate a new messaging type without re-compilation, by adding loadable software code modules to one or more databases with which the application can interface, each database providing code modules relevant to the execution of one or more of said tasks.

**Appl. No.** : **Not Assigned**  
**Filed** : **Herewith**

42. A software program for manipulating messages of a given type, comprising one or more databases capable of interfacing with a single messaging application, the one or more databases providing registered information about installed loadable software code modules relating to at least one of message type specific attributes and operations, each database individually providing code modules relevant to the execution of one or more tasks including:

- a) Reporting to the single messaging application functional capabilities of one or more loadable software code modules;
- b) Supplying text for on-screen menus;
- c) Creating, editing, displaying messages;
- d) Converting messages to be sent by the application to a protocol and format required by an external recipient and a conversion of messages received by the application to a protocol and format required by the single messaging application.

43. The software program as claimed in Claim 42 being a dynamically loadable plug-in to the messaging application.

44. The software program as claimed in Claim 43 wherein the loadable software code is object oriented code which creates real objects to execute a task.

45. An electronic communications apparatus programmed to perform a method of manipulating electronically generated messages belonging to at least two of the following messages types: e-mail, fax, video, pager, SMS, voice mail; comprising a single messaging application component handling the electronically generated messages.

46. An electronic communications apparatus programmed with a software program for manipulating messages of a given type, comprising loadable software code modules capable of interfacing with a single messaging application, the loadable software code modules relating to at least one of message type specific attributes and operations and the single messaging application being operable to manipulate electronically generated messages belonging to at least two of the following messages types: e-mail, fax, video, pager, SMS and voice mail.



Appl. No. : Not Assigned  
Filed : Herewith

REMARKS

The foregoing amendments are to more closely conform the application to U.S. practice. No new matter is added. Entry of the amendments is respectfully requested.



Dated: 10/11/00

Respectfully submitted,

KNOBBE, MARTENS, OLSON & BEAR, LLP

By: Arthur S. Rose

Arthur S. Rose  
Registration No. 28,038  
Attorney of Record  
620 Newport Center Drive  
Sixteenth Floor  
Newport Beach, CA 92660  
(949) 760-0404

H:\DOCS\CLA\SYMBIAN\PREAMEND.DOC ca  
101000



1/11/00

09/673161

529 Rec'd PCT/PTO 11 OCT 2000

## MESSAGING ARCHITECTURE

### Field of the Invention

5 This invention relates to a messaging architecture, and particularly to an architecture which can manipulate electronically generated messages such as e-mail, fax, video, pager, SMS and voice mail messages.

### Description of the Prior Art

10 E-mail messaging applications are widely used in computers to allow e-mail to be created, displayed, sent and received. Examples of widely used PC e-mail messaging applications include Eudora and Microsoft Outlook. Messaging applications are also available for other message types, such as fax, pager, and SMS.

15 The conventional messaging approach requires a different application for each message type. Hence, a user set up to receive multiple message types will typically have to (a) learn a number of different messaging applications and/or (b) browse through the in-box folders of each of these applications to review all incoming messages. This can be both burdensome and time consuming. For example, some messaging applications can handle multiple message types; a conventional e-mail  
20 client can send and receive attachments which can be text documents, a voice file or a fax image. However, each of these different kinds of attachments have to be opened within a different application.

### 25 Statement of the Present Invention

In accordance with a first aspect of the present invention, there is provided a method of manipulating electronically generated messages belonging to at least 2 of the following messages types: e-mail, fax, video, pager, SMS, voice mail; comprising the step of handling the electronically generated messages using a single messaging  
30 application.

Hence, the present invention is predicated on the insight that a messaging architecture comprising just a single messaging application can be constructed which can create, edit, display, send, receive, copy, move, delete and print (the generic term 'manipulate' will be used to refer to any of these acts, or combinations of these acts) the full range of current and likely future message types (e-mail, fax, video, pager, SMS and voice mail). The term 'messages' covers not only messages which are discrete units of information but also continuous information streams – i.e. streamed messages. It extends to information in any media format, including for example music files and video clips. The present invention may be used in wireless information devices, smart phones, communicators and other handheld communications devices. It may also be used in other non-handheld environments, for example in the servers powering universal messaging web sites. All such hardware implementations are generically referred to as electronic communications apparatus.

This leads to considerable advantages over the prior art: the user only has to learn how to use a single application to deal with all incoming and outgoing messages; the user only has to browse a single application to see all received messages, irrespective of type (this feature is referred to as a 'universal in-box'); a single messaging application is likely to be more compact than a suite of messaging applications; and integration with other applications (for example, a word processor which can implement features like 'Send As' – a feature which enables a user to select the type of message to be sent, e.g. fax, e-mail etc.) is simpler since the other applications only need to integrate with a single messaging application rather than many.

In one embodiment, the single messaging application handles certain attributes of messages which are shared by all supported message types and applies or invokes certain operations to the attributes of the messages which are applicable to all supported message types. Hence, the messaging application itself may be constrained to handle 'generic' attributes and apply or invoke 'generic' operations, where the term 'generic' means applicable across a very broad range of message types, including e-

mail, fax, video, pager, SMS and voice mail. The generic attributes may include subject/description, date, size, message type, body text, originator, first recipient (some message types may define multiple recipients and different recipient classes but these are not known to the core application), priority, and a 'flag' indicating whether the message has attachments. Hence, the content of these attributes can all be displayed by the messaging application, even though they might originate from a very broad range of different messaging types and applications within types. The generic operations which the messaging application is constrained to apply or invoke are 'manipulating', namely creating, editing, displaying, sending and receiving, copying and moving (both of which are defined to differentiate local and remote operations, distinguishing CopyFromLocal from CopyFromRemote, CopyToLocal and CopyToRemote), deleting and printing.

All *transport specific* attributes and operations (i.e. those attributes and operations specific to the fax message type, or the e-mail message type, etc.) are in one embodiment handled by components, known as MTMs (Message Type Modules) which are entirely separate from the messaging application but which can be invoked by the messaging application as and when needed. Invoking code as and when needed is far more efficient than having to load the entire suite of code relevant to all message types.

Handling generic and transport specific parts of messages separately also leads to many advantages. For example, the architecture facilitates an implementation of the 'universal in-box' feature. The architecture can also be readily expanded to support any new message type merely by deploying a suitable new MTM for that new message type. Preferably, that is achieved using dynamically linked code, although it can also be achieved using statically linked code (the disadvantage of statically linked code is that new message types can be covered only by producing and distributing a new version of the application). The manner in which new MTMs must be designed is relatively unconstrained by the requirements of the messaging application itself,

giving developers of MTMs greater design freedom. Finally, an application implementing a function (such as 'Send As') requiring integration with a messaging application does not need to know anything about the various message types that are available since it need deal only with generic parts of a message; forcing the application (for example, a word processor) to possess transport specific knowledge would prevent 'Send As' from being extensible as new message types are installed.

Alternative approaches to implementing a single, core messaging application capable of handling many message types include (a) pushing *all* message data into the specific part and (b) forcing the core messaging application to know the specific data for every message type. Whilst within the scope of the present invention, these approaches have several disadvantages. The first approach would mean that every new message type could behave perfectly with its data but would severely restrict the functionality available from the messaging application itself. The second approach would mean that the set of supported message types available in the application could not be extended without recompilation of the messaging application.

The messaging application may interface with one or more databases with loadable software code modules (sometimes referred to as DLLs – Dynamic Linked Libraries) relating to message type specific attributes and/or operations. A DLL is computer code which is (a) loaded into a program as required, rather than being pre-loaded, or (b) code which is linked on demand rather than being prelinked, or (c) code which is dynamically linked rather than statically linked, or (d) code which uses late binding rather than early binding. The term DLL is not used in this specification to refer to a DLL from any one vendor. The ability to manipulate new messaging types may then be dynamically added to a system whilst the system is fully operational (i.e. without the need for re-compilation) by adding the new loadable software code modules appropriate for the new message types to one or more databases.

As an example, *transport specific* elements of facsimile messages are in a preferred embodiment handled by a facsimile MTM (Message Type Module), whilst all generic parts are also handled by the messaging application. So if a high resolution fax is received, the messaging application itself has no ability to *know* or possess any *interest* in whether the message is high resolution or not. Instead, the facsimile MTM informs the messaging application which type of message the particular MTM handles (i.e. the facsimile type). The messaging application can interface through an API with a database of different message types and DLLs which can manipulate message data: this database is an example of what is called a Registry; in the detailed description which follows, it is the Registry called the UI Data Registry. Hence, the Registry loads up the DLL code to enable the messaging application to handle incoming facsimile messages appropriately. The facsimile MTM in effect populates the generic attributes in the messaging application (i.e. subject/description, date, size, message type, originator, recipient). Body text is also a generic field but is not used by received facsimile messages, for which the received data is effectively an image rather than text. The messaging application then simply displays the data in the generic attributes fields.

Each MTM is itself made up of a number (typically 5) of DLLs. Each of these DLLs fulfils a specific role: provision of text and numeric data for menus in the core application (this allows message type-specific behaviour to be launched from the messaging application); the UI required for the edit and display of messages; an interface layer between the UI and the message store; bridging code to interface between the internal storage of the message data and the standard protocol formats required for the message type; each MTM typically also utilises a DLL that can be used by one or more of the other DLLs.

The use of DLLs for message type specific behaviour means that the messaging application itself does not have to include the code required for detailed UI, data storage or protocol format aspects of each messaging type. As noted earlier, this builds

in the ability for different vendors to produce different UIs, giving product differentiation, and also means that new messaging types can be dynamically added to a system whilst the system is fully operational by adding new DLLs to the Registry.

5 In a second aspect, there is provided a software program for manipulating messages of a given type, comprising one or more loadable software code modules capable of interfacing with a single messaging application, the loadable software code modules relating to message type specific attributes and/or operations and the single messaging application being operable to manipulate electronically generated messages belonging  
10 to at least 2 of the following messages types: e-mail, fax, video, pager, SMS and voice mail.

Such a software program may be a dynamically loadable plug-in to the messaging application. Each loadable software code module may be individually capable of  
15 enabling the execution of one or more tasks from the following list of tasks:

- (a) Reporting to the messaging application the functional capabilities of one or more loadable software code modules;
- (b) Supplying text for on-screen menus;
- (c) Creating, and/or editing and/or displaying messages;
- 20 (d) Converting messages to be sent by the application to a protocol and format required by an external recipient and the conversion of messages received by the application to a protocol and format required by the messaging application.

25 The loadable software code modules are typically implemented as object oriented code which create real objects to execute tasks.

In a third aspect, there is provided a computer operating system comprising a single messaging application operable to handle at least 2 of the following messages types: e-  
30 mail, fax, video, pager, SMS, and voice mail. The operating system is preferably

operable to participate in the performance of the first aspect of the method when used in conjunction with a software program defined in the second aspect.

In a forth aspect, there is provided a method of manipulating electronically generated messages using a messaging application, wherein the messaging application interfaces with several databases, each with loadable software code modules, each database individually enabling the execution of one or more tasks from the following list of tasks:

- (a) Reporting to the messaging application the functional capabilities of one or more loadable software code modules;
- (b) Supplying text for on-screen menus;
- (c) Creating, and/or editing and/or displaying messages;
- (d) Converting messages to be sent by the application to a protocol and format required by an external recipient and the conversion of messages received by the application to a protocol and format required by the messaging application.

This architectural approach, which can be referred to as multi-tiering, leads to several advantages, namely (1) the loading of an MTM component to deal with message-type-specific behaviour as required by the core application can be restricted to the functionality that is required at the time. For example, there is no need to load POP3 and SMTP protocol interface code while simply creating and editing an email message for later despatch from the device; conversely, when connected to a remote mailbox, the UI code for displaying an email message is not loaded. (2) Upgrades to the software can be provided in smaller components than would otherwise be the case. (3) The definition of strict APIs at each tier in the architecture allows for component development - a single component of an MTM can be developed in isolation with a relative guarantee that it will interoperate successfully with other components of the MTM.



In a fifth aspect, there is provided a computer system operable to perform the forth aspect of the invention when used in conjunction with the several databases defined in the forth aspect.

- 5 In a sixth aspect, there is provided electronic communications apparatus to perform any of the above inventive methods or programmed with any of the above inventive software.

### **Brief Description of the Drawing**

- 10 The invention will be described with reference to Figure 1, which is a functional overview of the messaging architecture envisaged in an embodiment of the present invention.

15

### **Detailed Description**

#### **Major Components**

- 20 The Messaging Architecture of the present invention is exemplified by the EPOC messaging architecture from Symbian Limited of the United Kingdom. The following discussion presumes some knowledge of object oriented software. For a detailed understanding of EPOC, a variety of public domain sources can be consulted, such as the WWW site [www.epoc.com](http://www.epoc.com), and freely available software developers kits for EPOC from Symbian Limited.

- 25 The architecture consists of three significant components - the *Message Server*, which provides true client/server access to all message data, an *Application Framework* which allows compliant plug-in components to be invoked by a *Core Application*. This Core Application is the Messaging Application 1, and the functionality supplied by the plug-in components is the implementation of any messaging protocol.

There are seven major components indicated by the diagram, as follows :

- The Messaging Application and its UI 1
- The Message Server 2, Client Sessions 3 and Message Data Store 4
- 5      • UI Customisation 5
- User Interface 6
- Client-side components 7
- Server-side components 8

10      The term 'Server' is used to refer to components which provide multiple shared access to a scarce resource (in this case, message files, serial ports and comms. devices). All components will typically be implemented in software within a single device, such as a smart phone or communicator.

15      The term 'Base' is used in the normal object orientation sense to refer to a declaration of what functions can be performed; the term 'Real' is used, again in the normal object orientation sense, to refer to how those functions will be performed.

20      The last four of the components above comprise the set of registerable plug-in components for a given MTM (Message Type Module). Typically, a real MTM will also have a utilities component which the other components can use, but this does not need to be stored in a given MTM Registry (the database of DLLs associated with a given MTM) because of support for explicit linkage in EPOC. This ensures that all DLLs that an application or DLL requires are loaded at the same time as the application or DLL.

### **The Messaging Application**

25      The core Messaging Application 1 within EPOC knows nothing about specific messaging protocols, and can only interact with generic APIs (Application Programming Interfaces). These generic, or base, APIs define functionality that must be provided by any plug-in components that are to be registered as MTMs. From the

user's point of view, the core application is the entry point to all messaging functionality on the EPOC device. The application contains, for all message types, the Inbox, Outbox and all folder manipulation for message storage. The actual appearance of the Inbox and Outbox can be different for each different message type which is supported.

The *Inbox* is, from the user's perspective, the list of all messages recently received onto the user's device and not yet dealt with. The Application 1 creates this view by first creating a Session 3 on the Message Server 2 - this allows the Application 1 to walk through the list of stored messages and display from each message the generic data that it stores. Drawing the Inbox in this way does not require the use of any message-type-specific data, and hence does not require the loading of any MTMs.

The Outbox and any local folder view are drawn in exactly the same way - since the user can only see generic data fields in those views (things like the message description or subject, date, size, priority and so on), the Application 1 does not need to invoke any type-specific functionality in the registered MTMs. The Inbox and Outbox are just special cases of *folder views* - views of the message store which group the messages together by their logical 'location', in which the concept of a folder is used to allow grouping of related messages together.

There is one exception to the rule of the Application 1 not needing to load any message type-specific functionality. This is the generation by the application of message type-specific menu items on the folder view. For example, the folder view always provides the options of creating a new message or receiving a fax. This functionality cannot be provided by the core Application 1 since it requires knowledge of individual message types. This leads us to the need for the UI Customisation 5 component, the first example of a registered MTM component.

## MTM Registries

In each of the UI 6, Client Side 7 and Server Side 8 blocks of the application framework (as shown in the diagram), use of an implemented component is never direct. Every MTM component used by the core Application 1, for example, is only accessed through the base API, either the 'Base MTM UI' 10 API or the 'Base Client MTM' 11 API. The core Application 1 knows these APIs and knows what kind of behaviour to expect when it invokes a given function in a base API. However, it does not know *exactly* what will happen since this depends on the type of message that is being manipulated.

The core Application 1 has to know that the real action it is invoking is related to the real message that is being manipulated. For example, it would be meaningless and probably dangerous for the Application 1 to give an e-mail message to code designed to work on fax messages. The application framework, and in particular the registries (i.e. the UI Registry 12, the UI Data Registry 13 and the Server Side Registry 14), prevent this misalignment of function and data by associating every message with a *type*. All interactions with message objects require the application to supply a type ID - this is simply a number that has no meaning other than to ensure that the Application 1, the Registry (12, 13 or 14), the MTM component created by the Registry and the message object created by the MTM are all dealing with the same type. This check is made throughout the application framework to ensure that data is not being mishandled.

The general operation of a Registry (of any type) is to load a DLL which contains code that can manipulate message objects of a given type. All MTM components must satisfy the appropriate base class API for the level of the application framework at which the component is to operate. The core Application 1 (or the Message Server 2, in the case of server-side MTM components) only deals with this base API and so it is essential that the real implementation of an MTM is correct.

## UI Customisation

Fundamental to the utility of the Messaging Application framework is the ability of a registered component to be able to report what it can and cannot do, to the application. This is used through the QueryCapability function in the base API.

5

For example, when the user accesses the 'Create New Message' menu item, the Application 1 must be able to determine which of the registered MTMs can actually define messages locally and then transmit them from the device. An example of a message type which supports 'sending' is fax or email; Cell Broadcast Service (a GSM protocol which allows text delivery to all suitably-equipped handsets in a cell) is receive-only. Each time the core Application 1 needs to know a particular capability for each of the registered message types, which has a simple yes/no answer (e.g. 'Can send messages', 'Can support attachments') or which has a simple numeric answer (e.g. 'Maximum message size' or 'Maximum number of attachments'), it invokes the UI Data Registry 13. This allows retrieval of the required data without having to load the entire MTM.

10

15

As indicated above, the UI Data component 13 of an MTM can also supply an entire menu command to the core Application 1. In this case, the registered MTM supplies a text string (for the menu) and a function number to the Application 1. When the user selects the relevant menu item from the folder view, the Application 1 calls back to the InvokeFunction API of the relevant MTM, passing back the function number that was originally supplied with the menu text string. At this point, the Application 1 has interacted not only with the UI Data Registry 13, but also with the User Interface Registry 12, and has loaded up the UI component for the appropriate MTM.

20

25

## User Interface

When the Application 1 is required to display and/or edit a message of a known type, it must first ensure that it has an editor/viewer object from the correct MTM. This is done through the UI Registry 12. The application gives the Registry the ID (simply a

number which has no meaning to the application), and the UI Registry 12 uses it to look up which DLL should be loaded. This look-up is done through a database of installed message types - the registration of a message type involves writing (among other things) its human-readable name and definition of which DLL contains the appropriate code to achieve the message type specific behaviour that is required.

The Base MTM UI 10 API provides generic functions such as 'Edit' to the core Application 1. The Real MTM 15 object includes all the data structures and code required to manipulate e-mail.

It is simply by invoking these functions that the Application 1 launches the editor and viewer objects for each message type. Implementation specific features - such as whether the message can have attachments, or whether a spell checker is available for the message body - are invisible to the core Application 1, and are only known within the Real MTM 15 on the diagram.

The UI components of an MTM know about the message type-specific data storage as well as the generic parts of the message. This knowledge is usually encapsulated in a few classes that are stored in the utility DLL mentioned earlier - this allows the client-side and server-side components within that MTM to access the same classes. This sharing of code is particularly important for storing and restoring message data - only one class should be aware of the storage format for an email, for example, and that class should be used wherever it is necessary to save or retrieve emails.

## **Client-side MTM Components**

Much of the functionality that the UI components of an MTM supply can also be accessed through the client-side MTM component (i.e. Client Side Registry 18, Real Client MTM 11 and Base Client MTM 19). The significant difference is that nothing that the client-side components supply requires any user interface. This allows any

external application to hook up to the messaging architecture and interact with message-type-specific data. The core messaging Application 1 is capable of using client-side components as well as UI components, but in practice the UI components supply sufficient functionality that this is not necessary.

5

The greater use of the client-side components will be in automation of messaging processes, where user interaction is not required. Examples of this are typically found in smart messaging, in which the EPOC device receives an incoming SMS message (the SMS MTM has been written so that it is always ready to receive a message without user intervention) and handles the data automatically and perhaps immediately. The data could be an Agenda entry, an electronic Business Card from a new contact or perhaps settings data for a new internet account. Client-side processes looking out for new messages of a particular type(s) will need to load the relevant client-side MTM to be able to interact with the data correctly.

10

15

### **Server-Side MTM Components**

Being able to handle message data in a common fashion within the Application 1 is only half the true requirement for a single messaging application that supports a Universal Inbox. It is also essential that message data can be converted to and from the formats that are used in the 'real world'. This is the job of the Server-side components of the MTMs (i.e. the Server Side Registry 14, Real Server MTM 16 and Base Server MTM 17).

20

25

For example, an incoming email will generally consist of a header and a number of body parts, all defined in normal ASCII text. An incoming SMS is formed in compliance with the relevant ETSI spec, and is a tightly-packed frame of 256 bytes of human unreadable binary data - it has to be decoded and converted before any sense can be made of it by a person.

Since every message type requires its own user interface and storage code to cater for attributes that are not found in other message types, and since every message type has different protocol and formatting requirements, it follows that the bridging software (between the internal storage of a message and the appearance it must have to be recognised off the device) must also be provided in a message-type-specific fashion to be loaded as appropriate.

### **An example: Creating and sending an e-mail**

First, the messaging Application 1 interfaces with the UI Data Registry 13 using an appropriate API; the messaging Application 1 then issues a QueryCapability to all of the registered MTMs to determine which ones can send messages. It then creates a cached list of all registered MTMS which are capable of sending a message of any type.

The UI Data Registry 13 passes to the Application 1 the text string for the human readable name of the message types capable of sending messages for use in creating the menu for the inbox (or other folder view). Hence, for each message type that *can* send messages, the human-readable name is displayed on the side menu when the user selects 'Create new' on the folder view menu.

The Application 1 then takes the Message type ID appropriate to the name chosen by the user (in this case, 'e-mail'), and submits it to the UI Registry 12, requesting a component that can handle the generic and transport specific data of e-mail. (The messaging application could also submit the e-mail Message type ID to the Client Side Registry and the Client Side Registry could then undertake all the steps, described below, which are taken by the UI Registry.) The UI Registry 12 then creates a real e-mail object: the Real MTM 15 shown in the figure. The Real MTM 15 includes all the data structures and code required to manipulate e-mail. The messaging application then transacts with the generic message APIs in the Base MTM UI 10.



The UI Registry 12 loads the DLL which has been registered as containing the Email editor, and returns to the application a pointer to a function which can be used to create an Email editor object. The core Application 1 knows that all editors, regardless of type, supply a function 'Create' which will create a new message and display it to the user for definition. The Application 1 is unaware of the actual type of the message (it only had a number which it got from the menu and passed direct to the UI Registry 12), but the user sees a real email editor with all the fields he expects to see. When the user starts entering a new message, the Server 2 is asked to create a new Data Store 4 to hold the message. The Server 2 tells the Real Client MTM 11 the address of the Data Store 4 and how to write to it. When the user is satisfied with the email, he selects 'Close' on the editor's menu (note that this is within message-type-specific code) and the email editor saves all parts of the message - the generic fields, the email-specific data and the body text.

To send a message, the user browses the Outbox and selects the 'Send' function. If all messages are e-mails, then the messaging Application 1 submits the e-mail Message type ID to the Client Side Registry 18. The Client Side Registry 18 then creates the Real Client MTM 11 object: that opens up the correct data store for the message and performs any preparation required (e.g. checking that any attachments are still in existence). The Application 1 then creates a Session 3 to tell the Server 2 that it wants to send a message, which has been given a unique identifying number. The Server checks the Message type ID and loads up the correct Real Server MTM 16. The Base Server MTM 17 includes the operation 'Send'; once activated, the Real Server MTM 16 opens the message and works out the correct support components, such as TCP/IP 20. It then performs the required encoding (typically Base 64) of any attachments, and then transmits the message. After transmission, it closes the Data Store 4 file, tags it as successfully sent and then tells the Session 3 that the message has been sent.

**Claims**

- 5        1.        A method of manipulating electronically generated messages belonging to at least 2 of the following messages types: e-mail, fax, video, pager, SMS, voice mail; comprising the step of handling the electronically generated messages using a single messaging application.
- 10       2.        The method of manipulating electronically generated messages as in Claim 1 wherein the single messaging application handles certain attributes of messages, these attributes being shared by all of the message types.
- 15       3.        The method of manipulating electronically generated messages as in Claim 2 wherein the single messaging application invokes or applies certain operations to the attributes of the messages, these operations being applicable to all of the message types which are capable of being manipulated by the messaging application.
- 20       4.        The method of manipulating electronically generated messages as in Claim 3 wherein the messaging application interfaces with one or more databases of loadable software code modules relating to message type specific attributes and/or operations.
- 25       5.        The method of manipulating electronically generated messages as in Claim 4, wherein a new messaging type can be dynamically added to a system whilst the system is fully operational by adding new loadable software code modules to one or more databases.

6. The method of manipulating electronically generated messages as in Claim 3 wherein all user interface code is accessed through a database using loadable software code modules.

5 7. A software program for manipulating messages of a given type, comprising loadable software code modules capable of interfacing with a single messaging application, the loadable software code modules relating to message type specific attributes and/or operations and the single messaging application being operable to manipulate electronically generated messages  
10 belonging to at least 2 of the following messages types: e-mail, fax, video, pager, SMS and voice mail.

8. The software program as claimed in Claim 7 wherein the software program is a dynamically loadable plug-in to the messaging application.

15 9. The software program as claimed in Claim 7 wherein each loadable software code module is individually capable of enabling the execution of one or more tasks from the following list of tasks:

- 20 (a) Reporting to the messaging application the functional capabilities of one or more loadable software code modules;
- (b) Supplying text for on-screen menus;
- (c) Creating, and/or editing and/or displaying messages;
- (d) Converting messages to be sent by the application to a protocol and format required by an external recipient and the conversion of  
25 messages received by the application to a protocol and format required by the messaging application.

10. The software program as claimed in Claim 9 wherein the loadable software code is object oriented code which creates real objects to execute a task.

11. A software program messaging application capable of manipulating electronically generated messages belonging to at least 2 of the following messages types: e-mail, fax, video, pager, SMS, and voice mail.

5 12. A computer operating system comprising a single messaging application operable to handle at least 2 of the following messages types: e-mail, fax, video, pager, SMS, and voice mail.

10 13. An operating system operable to participate in the performance of any preceding method claim when used in conjunction with a software program defined in Claims 7 to 10.

15 14. A method of manipulating electronically generated messages using a messaging application, wherein the messaging application interfaces with several databases, each with loadable software code modules, each database individually providing code modules relevant to the execution of one or more tasks from the following list of tasks:

- 20 (a) Reporting to the messaging application the functional capabilities of one or more loadable software code modules;
- (b) Supplying text for on-screen menus;
- (c) Creating, and/or editing and/or displaying messages;
- 25 (d) Converting messages to be sent by the application to a protocol and format required by an external recipient and the conversion of messages received by the application to a protocol and format required by the messaging application.

15. The method of manipulating electronically generated messages as in Claim 14, wherein appropriate software code modules are loaded only when required by the messaging application.

16. The method of manipulating electronically generated messages as in Claim 14 wherein the messaging application can handle at least 2 of the following messages types: e-mail, fax, video, pager, SMS, voice mail.

5 17. The method of manipulating electronically generated messages as in Claim 16 wherein code to manipulate each message type is accessed using several databases, each with loadable software code modules, each database individually providing code modules relevant to the execution of one or more tasks from the list of tasks defined in Claim 14.

10

18. The method of manipulating electronically generated messages as in Claim 17 wherein the application can be enhanced to manipulate a new messaging type without re-compilation, by adding loadable software code modules to one or more databases with which the application can interface, each database providing code modules relevant to the execution of one or more of the tasks defined in Claim 14.

15

19. A software program for manipulating messages of a given type, comprising one or more databases capable of interfacing with a single messaging application, the one or more databases providing registered information about installed loadable software code modules relating to message type specific attributes and/or operations, each database individually providing code modules relevant to the execution of one or more of the tasks defined in Claim 14.

20

25

20. The software program as claimed in Claim 19 being a dynamically loadable plug-in to the messaging application.

21. The software program as claimed in Claim 20 wherein the loadable software code is object oriented code which creates real objects to execute a task.

30

22. An electronic communications apparatus programmed to perform the method of any of Claims 1 – 6, or 14 – 18,

5

23. An electronic communications apparatus programmed with the software of any of claims 7 - 13, or 19 – 21.

10

15

20

25

30

096346410400

## Abstract

### 5      **Messaging Architecture**

A messaging architecture is disclosed which enables a single messaging application, handling non-transport specific attributes and operations, to manipulate any commonly known message type (such as fax, e-mail, pager, SMS, voice mail) using dynamically loadable plug-ins which contribute the ability to handle all transport specific attributes and operations. This architecture results in a single in-box being presented to a user for browsing all incoming messages, irrespective of message type.

10

15

20

1/1



### Figure 1





Attorney's Docket No. ORI2.001APC

### DECLARATION - USA PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled Messaging Architecture

the specification of which:

- (a) ☐ is attached hereto; or
- (b) ☐ was filed on \_\_\_\_\_ as Application No. 0 / \_\_\_\_\_ or Express Mail No., as Application No. not yet known \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable); or
- (c) ☒ was described and claimed in PCT International Application No. PCT/GB00/00385 filed on 9 February 2000 and as amended under PCT Article 19 on \_\_\_\_\_ (if any) and/or under PCT Article 34 on \_\_\_\_\_ (if any).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above;

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, § 1.56;

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent, design or inventor's certificate or any PCT international application(s) listed below and have also identified below any foreign application(s) for patent, design or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed for the same subject matter having a filing date before that of the application(s) of which priority is claimed:

#### PRIOR FOREIGN APPLICATION(S)

COUNTRY (OR INDICATE IF PCT)	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. § 119
Great Britain	9903032.2	11 February 1999	<input checked="" type="radio"/> YES <input type="radio"/> NO
			<input type="radio"/> YES <input type="radio"/> NO
			<input type="radio"/> YES <input type="radio"/> NO
			<input type="radio"/> YES <input type="radio"/> NO
			<input type="radio"/> YES <input type="radio"/> NO

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below, and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful, false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: Greenwell, Thomas Ralph Edward

Inventor's signature [Signature] Day \_\_\_\_\_ Month \_\_\_\_\_ Year \_\_\_\_\_

Residence (city and country): 34 High Street, Redmond, Abbots Langley, Herts, WD5 0DX Great Britain GBN

Citizenship: Great Britain

Post Office Address: Same as above

Full name of second inventor: \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Day \_\_\_\_\_ Month \_\_\_\_\_ Year \_\_\_\_\_

Residence (city and country): \_\_\_\_\_

Citizenship: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

Full name of third inventor: \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Day \_\_\_\_\_ Month \_\_\_\_\_ Year \_\_\_\_\_

Residence (city and country): \_\_\_\_\_

Citizenship: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

Send Correspondence To:  
**KNOBBE, MARTENS, OLSON & BEAR, LLP**  
 Customer No. 20,995